



# Solis

## THE TOUGHEST PERFORMER FOR YOUR FIELD

### Solis 90CRDi

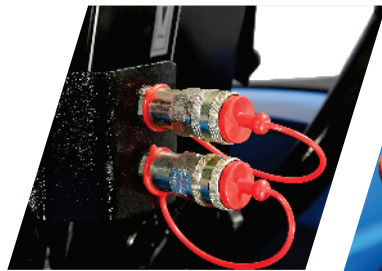

DYNAMIC  
2WD & 4WD

EXTRAORDINARY  
4 CYLINDER ENGINE

STRONG BUILT  
HEAVY DUTY TRACTOR

REVERSE SYNCHRO  
SHUTTLE FEATURE

HIGH TECH  
LIFT-O-MATIC FEATURE



**3** YEARS  
WARRANTY  
(2000 HOURS)

**COST**  
EFFICIENT  
MECHANICAL TRACTORS

REINFORCED  
**STEEL**  
BUILT

STRATEGIC  
COLLABORATION WITH  
**YANMAR**

# Solis

**THE TOUGHEST  
PERFORMER  
FOR YOUR FIELD**

**Solis 90CRDi**



FEATURES	SOLIS 90CRDi
Model Description	SOLIS-90 CRDi
<b>ENGINE</b>	
Engine Type	4 Cylinder turbo Charged Engine
HP Category	90
No. of Cylinders	4
Aspiration	Turbo Charged Intercooled (TCIC)
Cubic Capacity (cc)	4087
Rated RPM (+/-25mm)	2000
Air cleaner	Dry Air Cleaner with Clogging sensor
Cold Start	Yes
Max Torque (Nm)	375@1400
Exhaust	Underhood Downdraft silencer Underhood Upward
<b>TRANSMISSION</b>	
Drive	2WD/4WD
Clutch	Double Clutch
Gearbox	12F+12R-Standard, 12F+12R- Creeper 12F+12R-40 Kmph
Front Axle	2WD/4WD
Transmission	Synchronmesh
<b>SPEED (FORWARD)</b>	
Maximum Speed (Km/Hr)	35.45 @ 2000
Minimum Speed (Km/Hr)	1.53 @ 2000
<b>BRAKES</b>	
Brakes	Oil Immeresed Brake
Type of actuation	Mechanical
Parking Brake	Indipendant Type
<b>DIFFERENTIAL LOCK</b>	
Differential lock	Yes, Foot Operated
<b>PTO</b>	
PTO (rpm)	540/540E
PTO (actuation)	Mechanical
<b>STEERING</b>	
Steering	Power
<b>ELECTRICAL</b>	
Battery	12V 110 AH
Alternator	12V,90Amp
Seven pin trailer socket	Yes
<b>HYDRAULICS</b>	
3 point linkage	CAT-II
Stay Bars	Adjustable
Hydraulic lifting capacity	2500 Kg, 3000 Kg (Optional)
Auxiliary hydraulic circuit	2SA/2DA
Lift rods	Yes

FEATURES	SOLIS 90CRDi
<b>SAFETY SWITCH</b>	
Clutch Safety Switch	Yes
PTO Safety Switch	Yes
Neutral Safety Switch	Yes
<b>CAPACITY (LTRS)(+/-5%)</b>	
Fuel tank (Lit)	85
<b>TURNING RADIUS</b>	
Without Brakes (m)	11.2
<b>TYRE</b>	
Front	12.4-24
Rear	18.4-30
<b>DIMENSION &amp; WEIGHT(+/-5%)</b>	
Weight(kg)	3255
Wheel Base (mm)	2350
Total Length (mm)	4285
Total Width (mm)	1980-2085
Height (mm) Up to ROPS	2775
Min Ground Clearance (mm)	390
Front Track (mm)	1520-1940
Rear Track (mm)	1445-1845
<b>OTHERS</b>	
Fuel Indicator gauge	Yes
Front Toe Hook	Yes, inbuilt in front weight
Front & rear weights with std. Ballast	Front-72 Kg base wt,31x6Kg front removal weight.
Trailer Hitch	Swinging Drawbar
ROPS	Yes
FOPS	Optional
<b>OPTIONAL FEATURES</b>	
Tyres	Front-320/85R24 Rear-460/85R30
Cabin	HVAC
Front Mudguard	Yes
Trailer Brake	HTB/ATB/Dual ATB

DEALER STAMP



**COLM BURNS COMMERCIALS LTD**

Old Dublin Rd, Sligo  
Phone: 071 91 60986 | Email: sales@cbc.ie | Web: www.cbc.ie